

NCTS-INSF072


Product Features

Mainly used in the wiring system between work area correspondence leading-out terminal and distribution wiring frames connection. As well as used in the housing synthesis wiring system between user correspondence leading out terminal and patch panel.

Meets Cabling Standards:

CAT6A Cable is designed for improve crosstalk performance between cablesapplying in 1000Base-T Enternet with up to 500MHZ bandwidth.HDPE insulation and pair shield design make the cable with excellent shielding & anti-EMI peformance.



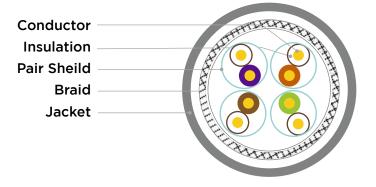





CAT 7 S/FTP 4P+F Twisted Pair Indoor Cable | 23AWG | CCA

Technical Specifications

MODEL: NCTS-INSF072

Brand:	NCTS	Color:	GREY
Conductor Material:	Copper	Conductor Size:	23AWG (0.58mm)
Conductor Structure	Solid	Twisted Pair:	4PAIRS
Jacket Material	PVC	Insulation Material:	PE
Insulation Thickness	0.18mm	Insulation Diameter:	1.0mm(±0.02mm)
Jacket Thickness	0.68mm(0.02±mm)	Outer diameter:	7.5mm(±0.2mm)
Impedance:	100±15%Ω	Braiding cover:	80* 0.12AI
Frequency:	500MHz	Flame Retardancy	CM / CMR
Delay deviation:	4ns/100m	Standard:	
Operating Temperature	-40 °C - +70 °C		







