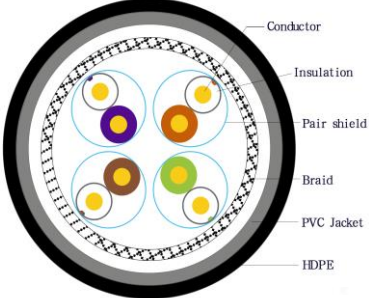


NEW COMPUTER TECHNOLOGY SYSTEMS (NCTS) LIMITED COMPANY

新计算机科技系统 (NCTS) 有限公司

深圳市龙岗区布吉诚信华庭2栋6B

www.ncts.co

<div style="display: flex; justify-content: space-between; align-items: flex-start;"> <div style="width: 30%;"> <p>NCTS-ONSF072 SFTP cat7 indoor cable Data Sheet</p> </div> <div style="width: 30%;"> <p>NCTS-ONSF072</p> <p>SFTP CAT7 OUTDOOR CABLE CONDUCTOR:0.58mm CCA Unrip Nylon Yarn INSULATION DIA:1.0mm(±0.02mm) Al foil+Mylar Braiding cover:80*0.12Al Outer Dia:7.2mm(±0.02mm) Jacket:New PVC+New PE, double Jacket black color</p> </div> <div style="width: 30%;">  <p>SFTP Cat7 outdoor</p> </div> </div>			
Brand:	NCTS	Color:	GREY or as request
Conductor Material:	copper	Conductor Size:	23AWG (0.58mm)
Conductor Structure	Solid	Twisted Pair:	4PAIRS
Jacket Material	PVC	Insulation Material:	PE
Insulation Thickness	0.18mm	Insulation Diameter:	1.0mm(±0.02mm)
inner Jacket:	New PVC	Outer Jacket:	New PE
Jacket Thickness	0.68mm(±0.02mm)	Outer diameter:	7.2mm(±0.2mm)
Impedance:	100±15%Ω	Braiding cover:	80*0.12Al
Frequency:	500MHz	Flame Retardancy Standard:	CM / CMR
Delay deviation:	4ns/100m	Operating Temperature	-40 °C - +70 °C
Feature & Advantages:	CAT7 cable with pair-shield construction desing have excellent shieding performance of anti-EMI, easy to realize 600MHZ bandwidth.		